

UP TO 70KG / CASTOR

# UTILITY SERIES BOLT CASTORS

Ideal for light duty applications including wire baskets, display equipment and light trolley applications, Richmond's Utility Series Bolt Castors offers a corrosion resistant attractive zinc plated finish in a pressed metal construction.

A choice of a nylon wheel or non-marking grey rubber adds to the versatility of this castor.

The ability to add various pintle fittings for round or square tubing ensures maximum functionality and performance.



S3714B

## SPECIFICATIONS & FITTINGS

 Diameter (mm)	 Width (mm)	 Wheel Type	 Wheel Code	 Bearing Type	 Load Capacity	 Height (mm)	 Swivel Radius	 With Brake	 Bolt Size (mm)	 Swivel Code
50	20	Inst Rubber	-	Ball	30/20	68	49	75	10	S2714
50	20	Nylon	-	Plain	30/20	68	49	75	10	S2712
75	25	Inst Rubber	IR3301	Ball	50/40	98	65	85	10	S3714
75	25	Nylon	NY3324	Plain	50/40	98	65	85	10	S3712
100	25	Inst Rubber	IR4401	Ball	70/60	131	90	100	10	S4714
100	25	Nylon	NY4415	Plain	70/60	131	90	100	10	S4712

To order castor with Swivel Lock & Brake, add B to the end of the Swivel Code, eg. S3714B indicates a brake castor. See page 92 for Solid and Threaded pintle options


## NYLON EXPANDING PINTLES

Pintle	Pintle Code	Pintle Type
	UT110-P1	For 19mm ID Round Tube
	UT110-P2	For 22mm ID Round Tube
	UT110-P3	For 28.5mm ID Round Tube
	UT110-P4	For 19mm ID Square Tube
	UT110-P5	For 22mm ID Square Tube
	UT110-P6	For 28.5mm ID Square Tube
	Single Bolt Fitting 10mm Various Bolt Lengths Available	



S2714

S3712

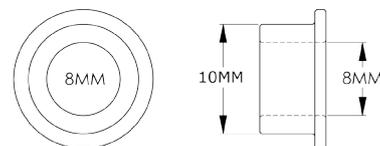

Reduction bush available to suit 8mm fittings, code 100RED1008UTI

## CASTOR FITTING REQUIREMENTS

To fit this castor to a 20mm thick base requires a 40mm x 10mm set screw