


DRIVE WHEELS

Drive wheels are polyurethane tyred with a hardness of 85A on the shore scale. The cast iron centre is bored to provide a transition fit onto a shaft.

These drive wheels are stocked without keyways cut, but if your application requires keyways we can supply on request. These wheels are suitable for intermittent use only. If your application requires continuous running usage, our engineering department can recommend more suitable polyurethane tyres.

- 85A shore scale hardness
- Available with keyways cut on request

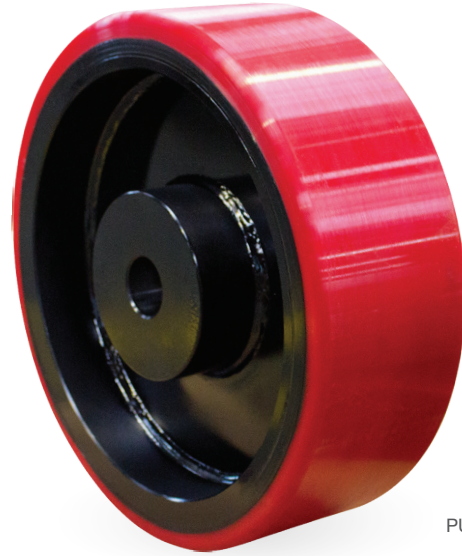

PU1800DV

 Wheel Diameter (mm)	 Tyre Width (mm)	 Boss Width (mm)	 Axle Diameter	 Bearing Type	 Load Capacity (kg)	 Wheel Code
150	75	76	25mm	Plain	900	PU615DV
150	50	63	25mm	Plain	500	PU659DV
200	50	63	25mm	Plain	700	PU876DV
200	75	76	25 to 40mm	Plain	900	PU896DV
250	100	112	50mm	Plain	5000 (57D)/ 3750 (90A)	PU1049DV
250	50	60	25 to 50mm	Plain	1200 (57D)/ 900(90A)	PU1056DV
250	75	76	25 to 40mm	Plain	1100	PU1076DV
300	100	102	50mm	Plain	2000	PU1207DV
300	75	76	25 to 50mm	Plain	1000	PU1217DV
400	125	137	50mm	Plain	2800	PU1606DV
450	150	152	50mm	Plain	3500	PU1800DV

All wheel options can be supplied to order with any bore sizes, keyway, spline or shaft locking element. Assembly may be required.



PU659DV

PU876DV

PU1076DV